

# TWINSTAR 3Z24-4Z28-4Z33




### 3Z24



### 4Z28



### 4Z33

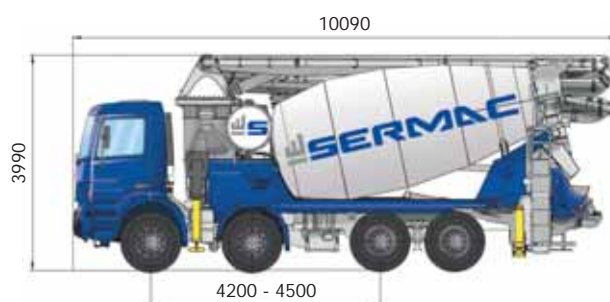

## PUMPING UNIT - specifications

	SCC73A
TH. CONCRETE OUTPUT (MAX)* ROD SIDE	73 m <sup>3</sup> /h (95 cy/h)
CONCRETE PRESSURE (MAX)* ROD SIDE	54 bar 882 p.s.i.
NUMBER OF STROKES (MAX)* ROD SIDE	48 c/min
PISTON DIAMETER	180 mm
STROKE LENGTH	1000 mm
POWERED BY	PTO/AUX D
CONCRETE HOPPER	450 l

## BOOM - SPECIFICATIONS

	3Z24	4Z28	4Z33
NUMBER OF SECTIONS	3	4	4
FOLDING TYPE	Z	Z	Z
MAX VERTICAL REACH	24 m	28 m	32,2 m
MAX HORIZONTAL REACH	20 mm	24 mm	28,2 mm
MAX DOWNWARD REACH	-13,7 m	-18 m	-22 m
UNFOLDING HEIGHT	6.9 m	6.35 m	7.4 m
ROTATION	370°	370°	370°
SECTION ARTICULATION	106° - 180° - 265°	90° - 180° - 255° - 260°	90° - 180° - 255° - 260°
CONCRETE PIPELINE	Ø 100 mm	Ø 100 mm	Ø 112,5 mm

\*Cannot be reached simultaneously

Also available different models: please, don't hesitate to contact our offices