


Model		KB18	KB30	KB40	KB60
	t lb	10/18 22000/39600	18/24 39600/52900	24/35 52900/77200	35/50 77200/110200
	kg lb	1890 4166	3000 6613	4100 9038	6100 13448
	l/min gpm	100 26.42	145 38.30	200 52.83	290 76.61
	bar psi	220 3190	220 3190	220 3190	220 3190
A	mm inch	1100 43.30	1210 47.63	4550 57.08	1820 71.65
B	mm inch	1940 76.38	2210 87	2350 92.51	2570 101.20
C	mm inch	1300 51.18	1370 53.93	1390 54.72	1550 61.02
D	mm inch	650 25.59	750 29.52	950 37.40	1250 49.21
E	mm inch	500 19.68	500 19.68	525 20.67	570 22.44
Load Volumes	m ³	0.51	0.73	1.00	1.66

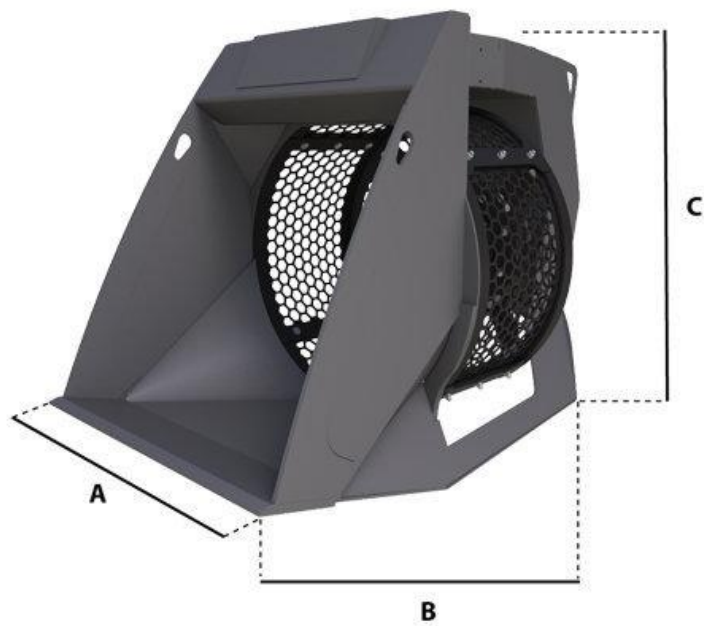

Model		KR06	KR12	KR20	KR40
	t lb	8/15 17600/33000	13/25 8800/15400	22/40 11000/26400	35/60 15400/35200
	kg lb	640 1408	1220 2684	2340 5104	4600 10120
	l/min gpm	15 4	20 5	25 6	45 12
	bar psi	200 2900	200 2900	200 2900	210 3045
A	mm inch	935 36.81	1355 53.55	1850 72.83	2210 87.01
B	mm inch	1790 75	2390 94	3140 124	3740 124
C	mm inch	1190 64.85	1600 62.99	2130 83.86	2230 87.80
Screen	mm inch	20/80 0.78/3.14	20/120 0.78/4.72	20/150 0.78/5.90	20/80 0.78/3.14
Drum Diameter	mm inch	800 31.50	1200 47.24	1600 62.99	2000 78.74
Load Volumes	m ³	0.60	2.00	4.80	7.50